

# FOCUS ON YOUR TASK

MADE  
IN  
GERMANY

**VUMAN<sup>+</sup>** **E3<sup>+</sup>**  
dition .64



DOWN TO Ø **6** MM UP TO 30 M PROBE LENGTH

# The Definition of Long Range

VUMAN® **E3<sup>+</sup>**  
dition -64

**THE LARGEST  
TOUCHSCREEN**  
WITH 1440 X 1080 PX  
RESOLUTION

**THE MOST PRECISE  
ARTICULATION**  
JOYSTICK CONTROL  
ABSOLUTE AND RELATIVE ARTICULATION

**THE MOST INTUITIVE  
OPERATION**  
SLIDEBARS FOR  
REMOTE FOCUS AND ILLUMINATION

**MAXIMUM  
FLEXIBILITY**  
MULTI POSITION VUSCREEN  
FOR OPTIMUM ERGONOMICS

**THE SAFEST  
DEPLOYMENT DRUM**  
WITH HANDLE FOR EASY STOWING  
OF THE PROBE

**THE SHARPEST  
IMAGE**  
THANKS TO OUR PATENTED  
REMOTE FOCUS TECHNOLOGY

**THE LIGHTEST  
CARBON FIBER HOUSING**  
HIGH QUALITY AND ROBUST WITH  
LIFETIME WARRANTY

**THE BRIGHTEST  
DUAL LED LIGHTS**  
WITH LONG TIME WARRANTY

**THE UNIQUE  
MICRO COMPRESSOR**  
MAINTENANCE - FREE AND DIRECTLY  
INTEGRATED IN THE SYSTEM

**THE MOST ADAPTABLE  
VIDEO IN/OUT**  
HDMI AND ANALOGUE


**HIGH PERFORMANCE  
NiMH - BATTERY**  
UP TO 2.5 HOURS OPERATION, INCL. MICRO COMPRESSOR  
WITHOUT EXTERNAL POWER SUPPLY





# UNIQUE FEATURES

SUCCESS IN EVERY INSPECTION



## LARGEST TOUCHSCREEN

Unique and portable LCD control unit with 10.4" touchscreen. Control your probe and all features via touchscreen and direct access buttons. Also usable with protective gloves.



## HIGH POWER DUAL LED

Each LED can be independently controlled to allow for increased contrast or avoid any reflection issues. Integrated 'boost' function and extended shutter time for clear visualisation in large cavities.



## MEDIA AND DATA CAPTURE

Record high resolution videos and images with personalized text entries, reference charts or customer logos. Manage all inspection data in the customizable file manager and export your data to a USB drive.



## X-WAY ARTICULATION

VUMAN® interchangeable video probes up to 30 m with unique 4-way camera head articulation. Now even more precise due to the revised integrated micro-compressor.




## REMOTE FOCUS

Patented remote focus technology allowing for full focal control without exchanging lenses.



## BATTERY POWERED

Powerful modular NiMH battery power for maximum mobility. Charges in use if on mains power. Seamlessly switch between charging, battery mode and mains. IATA air transport compliant, non-flammable.



## POWERFUL SYSTEM UPGRADE

The latest system allows for even faster and more efficient usage. The VUMAN E3 64 increases performance and raises your inspections to a new level.




## SAFE PROBE DEPLOYMENT DRUM

Avoid tripping and damage to your probe while maintaining a clean working environment. Enjoy full X-WAY probe articulation with the majority of your probe stored on the probe deployment drum.



## CARBON HOUSING

Robust and durable, compact and lightweight. The housing material is optimized for industrial environments.



## MEASUREMENT FUNCTION

E3+: Integrated measurement system for measurement of linear distance, radius, circumference and area. Limitless reference measurement.



## HOT SHOP REPAIR

100 % customer commitment: Our Hot Shop service meets the demands of all our customers, even those in the most demanding industries. We also offer a spare parts service. viZaar is ISO 9001, ISO 14001 and KTA 1401 certified.



## INTEGRATED SOLID STATE DRIVE

Store countless images and videos securely and safely on to the integrated 80GB solid state hard drive.

LIFETIME WARRANTY



# THE ULTIMATE LONG RANGE VIDEOSCOPE INSPECTION SYSTEM

PERFECT VISION FOR EVERY WORKING LENGTH

With up to 30 m long video probes, the VUMAN E3/E3+ is specifically designed for inspections that require a long range. The proprietary hybrid, high power, polymer dual LED illumination system provides class leading, homogenous illumination and excellent colour temperature. There is no need for a laser safety officer when operating the VUMAN®.

The unique patented REMOTE FOCUS system incorporated into the VUMAN® system ensures perfect documentation results without the need to withdraw the videoprobe from the application and to change lenses. This will reduce the inspection duration and user fatigue, save time and lower costs.

## ONE DEVICE FOR EVERY APPLICATION

CLOSE UP TO  $\infty$

### POPULAR APPLICATIONS

#### Plant and pipeline constructions

- welds
- heat tinting
- corrosion, erosion
- foreign object search and retrieval (in combination with retrieval tools)


#### Turbines, pumps, gears, generators

- cavitation, erosion, salinisation
- surfaces, discolouration
- cracks, breakages
- corrosion
- FOSAR



## RANGE OF FOCUS AND ILLUMINATION

VIZAAR REMOTE FOCUS VS STANDARD FIX FOCUS SYSTEMS

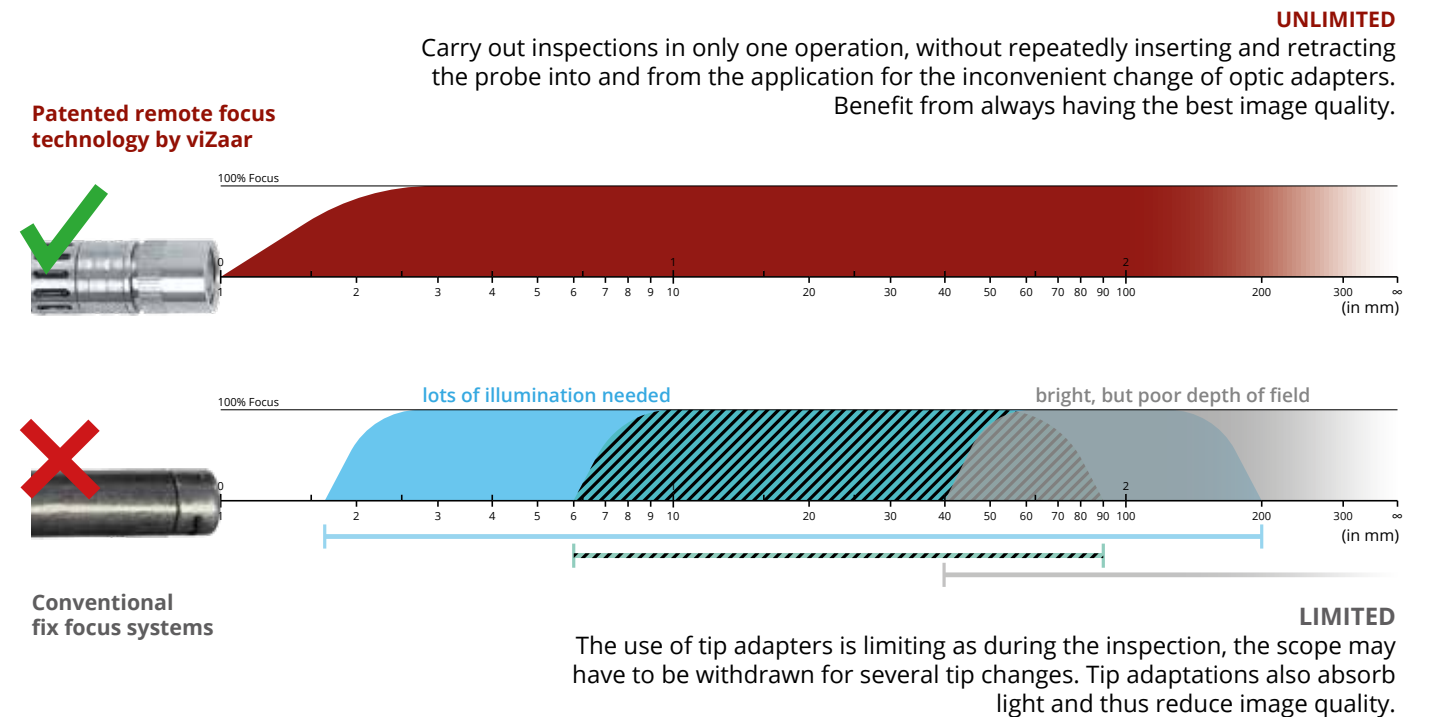



# THE UNIQUE INTERCHANGEABLE 6 MM VIDEO PROBE

NOW FOR EVEN NARROWER TEST ENVIRONMENTS

With a diameter of only 6.1 mm and probe lengths up to 30 m, our new VUMAN 6 mm X-WAY video probe is the only one of its kind. This probe makes inspections possible which before required expensive and long downtimes.



## OPTIONAL OPTIC ADAPTERS

Optimally equipped for your individual application!

## THE INTERCHANGEABLE PROBE SYSTEM

Economic and efficient: one VUMAN E3/E3+ base unit and 18 standard video probes offer an unparalleled diversity of inspection tools that no one else provides. In addition to the popular Ø 6.1 mm video probes, there are several Ø 8.4 mm and Ø 12.7 mm probes with up to 30 m length. Exchanging probes is a simple plug-and-play system that can be easily done in any environment. Fast, simple and versatile – all in one system.

By the way: The new VUMAN E3-64 continues to be compatible with all VUMAN V3 probes!



# VERSATILE PROBE ARTICULATION

CLASS LEADING 4-WAY ARTICULATION FOR LONG  
RANGE VIDEO PROBES



The pneumatic X-WAY articulation system allows for full 4 axis (up/down/left/right) articulation of all VUMAN® X-WAY probes up to 30 m length. The articulation is joystick-controlled and powered by an integrated, computer controlled micro-compressor, so there is no need for external air sources or gas canisters. Discover the advantages of a highly precise camera head articulation when operating in relative articulation mode with activated freeze function. Switch to absolute articulation when you need to work fast.

## IMPROVED COMPRESSOR TECHNOLOGY

The VUMAN E3-64 upgrade does not only improve the performance of the inspection system, but also the operation of the probe. Due to the optimized probe structure with new muscles, the camera head articulates much more precise.


# CENTERING TOOLS

THE IDEAL CENTERING AID FOR EACH PROBE

The use of centering tools...

- ensures a constant distance to the tested surface and delivers significant results, e.g. during the inspection of longitudinal welds and orbital weld seams
- reduces friction and increases the “feel” for maneuvering the probe
- protects probe and especially the camera head from residue and dirt
- leads to more precise probe positions and shorter inspection times

• Universal centering tool: suitable for most 6 and 8 mm video probes on the market.

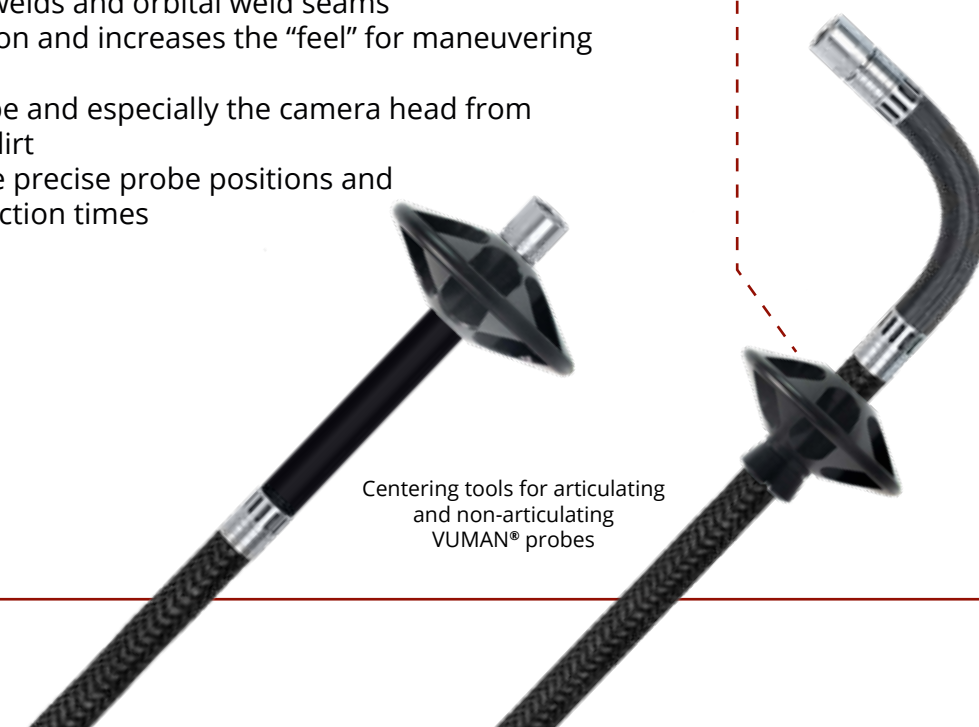

Centering tools for articulating and non-articulating VUMAN® probes

# VUMAN® INTERCHANGEABLE VIDEO PROBES


## A TOOL FOR EVERY TASK

If you have a long range inspection need, the VUMAN® system can now fulfil even more of your needs than before: From 6.1 mm articulating probes to 12.7 mm 360° rotating orbital inspection probes.



**THE WORLD'S SMALLEST  
DIAMETER ARTICULATING  
LONG RANGE PROBE!**

Our professional push rod, suitable for every VUMAN® probe!

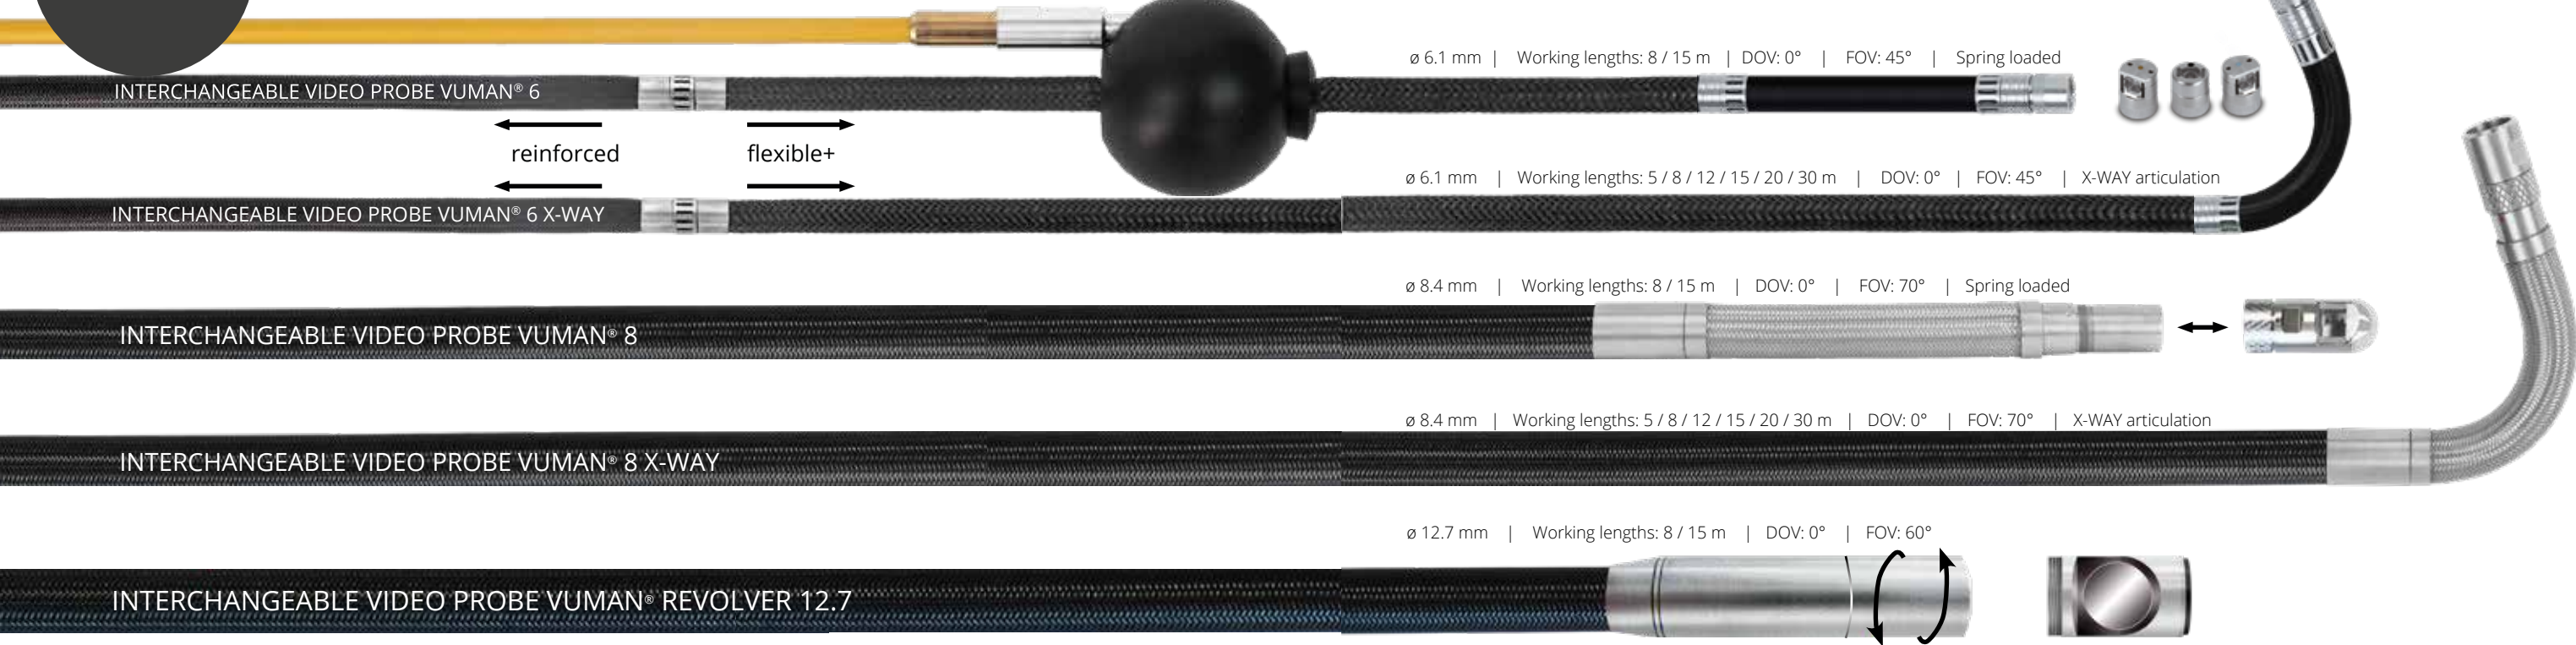

18 standard probes, easy plug-and-play - simply plug it in and start inspecting!

Some applications require a variety of video probes with different lengths and diameters. The concept of interchangeable probes allows for a quick and simple exchange of video probes on-site, avoiding the parallel use of several endoscope systems. In case of contamination, e. g. in chemical or nuclear industry, it also allows for the probe to be removed or disposed without having to clean or dispose of the entire system.

- Maximum range**  
Interchangeable VUMAN® video probes are available in lengths from 5 m to 30 m and with optional push rods.
- Optimally functional construction**  
The system was developed based on the feedback of our customers and service technicians, and optimized in the 3<sup>rd</sup> generation.
- Ideal probe characteristics**  
The tungsten or polyurethane stainless steel reinforced composite construction for excellent stability, best sliding properties and torsional stiffness. Different flexibility levels for flexibility+ 6 mm probes.
- Always in focus**  
The patented Remote Focus technology is offering the best resolution on the market: 30 µm at 4 mm distance without additional optic adapters.
- Perfect for Nuclear**  
viZaar is KTA 1401 certified. Therefore, our VUMAN technology is compliant with all requirements for the use in nuclear power plants.
- Optimized for your inspection**  
Our non-articulating video probes are designed for heavy duty tube inspections over long periods. Operated with centering devices, these video probes with their spring loaded probe tip are an economically unbeatable and robust remote visual inspection system for your tube inspection needs. X-WAY probes will help you overcome the most difficult inspections such as visual testing of turbines and pumps.
- Endlessly rotating camera head**  
Revolver 12.7: patented motor-driven camera head with variable rotation speed and direction for optimal testing of inner pipe walls.





# USER FRIENDLY CONTROL UNIT

## UNIQUE AND PORTABLE



**The VUSCREEN has always been known...**

- to be the biggest touch-display with 10.4"
- for its PPE compatibility: e.g. usable with gloves
- for its intuitive icon control and simple direct access buttons
- to offer precise articulation control via joystick

**Now, you will experience:**

- a higher resolution of 1440 x 1080 px
- a higher luminance of 850 cd/m²
- an extended color space for even better contrasts

**You would like to upgrade?**

As always, we want long term customers to benefit from our upgrades. Therefore, after a firmware update, you can also use the new VUSCREEN with the VUMAN RA-Y!

# LITHIUM-FREE BATTERY

## SAFE OPERATION AND TRANSPORTATION

Maximum mobility and flexibility is provided by the new and improved NiMH modular battery pack. It offers the best performance, incl. compressor operation. Depending on the intensity of use, the VUMAN can be operated 1 to 2 hours in battery mode. Seamlessly switch between charging, battery mode and mains. Due to its extensive intrinsic safety, fire hazard is minimized. Therefore, the VUMAN battery is approved for air transport.\*



\*Please beware the specific regulations of your country.

BASE UNIT	VUMAN® E3	VUMAN® E3 (64) X-WAY	VUMAN® E3+	VUMAN® E3+ (64) X-WAY
Dimensions in mm / inch	(W) 340 x (H) 425 x (D) 280 (W) 13.39 x (H) 16.73 x (D) 11.02	(W) 340 x (H) 425 x (D) 280 (W) 13.39 x (H) 16.73 x (D) 11.02	(W) 340 x (H) 425 x (D) 280 (W) 13.39 x (H) 16.73 x (D) 11.02	(W) 340 x (H) 425 x (D) 280 (W) 13.39 x (H) 16.73 x (D) 11.02
Weight	8.2 kg / 18.1 lbs	10 kg / 22 lbs	8.2 kg / 18.1 lbs	10 kg / 22 lbs (11.5 kg / 25.4 lbs)*
X-WAY drive	-	Integrated compressor, maintenance free.	-	Integrated compressor, maintenance free.
Probe length	max. 20 m / 65.6 ft.	max. 20 m / 65.6 ft.	max. 20 m / 65.6 ft.	max. 20 m / 65.6 ft. or 30 m* / 100 ft.
Construction	Aluminium-Carbon fiber with elastomer bumpers			
LED light source	Color temperature: 6.1 mm: 5500 K, 8.4 mm: 5000 K   lifetime warranty			
System memory	10GB SSD	10GB SSD	80GB SSD	80GB SSD
VUSCREEN mount	✓	✓	✓	✓
VUSCREEN transport bracket	✓	✓	✓	✓
Connectors	USB 3.0, 12V (DC) / 750mA Out, optional external compressed air (X-WAY)			
Video input	-	-	PAL / NTSC, Composite, S-Video	PAL / NTSC, Composite, S-Video
Video output	HDMI	HDMI	HDMI, optionally with additional analogue out (Composite, S-Video)	HDMI, optionally with additional analogue out (Composite, S-Video)*
AC input	100V (AC) - 240V (AC), 50 Hz - 60 Hz, max. 240 Watt			
Environmental specifications	Operation: -10°C (+14°F) to +48°C (+118°F) Storage: -25°C (-13°F) to +65°C (+149°F) Relative humidity: max. 95 %, non-condensing			
Software Kit	E3		E3+	
Software	<ul style="list-style-type: none"><li>• Default user with English user interface</li><li>• Probe articulation display (X-WAY)</li><li>• Articulation mode: absolute</li><li>• Dual LED illumination with boost</li><li>• White balance</li><li>• Text generator (Latin/Cyrillic)</li><li>• File manager</li><li>• Image freeze function</li><li>• Image capture (JPG)</li><li>• Video recording (AVI up to 60 s)</li><li>• Integrated media player</li><li>• Backup function</li></ul>		<b>Additional features of the E3+</b> <ul style="list-style-type: none"><li>• Individual user 1-9 and multilingual user interface</li><li>• Absolute and relative articulation mode (with freeze function)</li><li>• Individually controllable dual LED illumination with boost</li><li>• Brightness, contrast, color saturation</li><li>• Continuous shooting with varying illumination</li><li>• Extended brightening features (time exposure)</li><li>• Digital image processing (presets)</li><li>• Mirror, zoom and rotate</li><li>• Measurement function</li><li>• Individual reference chart / customer logo</li><li>• Image freeze with point marker</li><li>• Audio comments</li><li>• Unlimited video recording</li><li>• Choose image and video format (JPEG, BMP, AVI, MPG) in three quality levels</li><li>• Extended text generator (e. g. editable text blocks, text and background color)</li><li>• Extended file manager</li><li>• Documentation of external video sources</li></ul>	

\* The 30 m version of VUMAN® E3+ X-WAY is always fully equipped and comes with an extended probe deployment drum.





VUMAN® E3 PROBES	6 X-WAY	6	8 X-WAY (64)	8	REVOLVER 12.7
Probe diameter in mm / inch	6.1 / 0.24	6.1 / 0.24	8.4 / 0.33	8.4 / 0.33	12.7 / 0.5
Probe length in m / ft.	5 / 16.4 8 / 26.3 12 / 39.4 15 / 49.3 20 / 65.6 30 / 100	8 / 26.3 15 / 49.3	5 / 16.4 8 / 26.3 12 / 39.4 15 / 49.3 20 / 65.6 30 / 100	8 / 26.3 15 / 49.3	8 / 26.3 15 / 49.3
X-WAY articulation left / right	up to max. 100°*	-	up to max. 140°*	-	-
X-WAY articulation up / down	up to max. 120°*	-	up to max. 160°*	-	-
Springloaded camera head	-	✓	-	✓	-
Remote Focus (RF)	✓	✓	✓	✓	-
Focus range	3 mm to ∞	3 mm to ∞	5 mm to ∞	5 mm to ∞	manual focus
Direction of view (DOV)	0°	0°	0°	0°	0° (360° rotating)
Field of view (FOV)	45°	45°	70°	70°	60°
Resolution	470.000 px	470.000 px	440.000 px	440.000 px	440.000 px
Mounting for centering device	✓	✓	✓	✓	✓
Mounting for side view adapter	✓	✓	✓	✓	✓
Material	Hard wearing tungsten braid on polyurethane probe		Ultra flexible stainless steel braid on polyurethane probe		
Waterproof up to 1.5 bar / 22 psi	✓	✓	✓	✓	splash waterproof
Temperature in operation	-10°C (+14°F) to +80°C (+176°F)	-10°C (+14°F) to +80°C (+176°F)	-10°C (+14°F) to +80°C (+176°F)	-10°C (+14°F) to +80°C (+176°F)	-10°C (+14°F) to +80°C (+176°F)
Storage temperature	-25°C (-13°F) to +65°C (+149°F)	-25°C (-13°F) to +65°C (+149°F)	-25°C (-13°F) to +65°C (+149°F)	-25°C (-13°F) to +65°C (+149°F)	-25°C (-13°F) to +65°C (+149°F)
Centering device kit included in scope of delivery	-	-	-	-	✓

\*depending on the position of the probe



ACCESSORIES		
Transport case with wheels VUMAN® base unit	Dimensions in mm / inch: (W) 635 / 25 x (H) 510 / 20.08 x (D) 365 / 14.37  Weight (empty): 8.7 kg / 19.1 lbs	
Transport case VUMAN® spare probe	Dimensions in mm / inch: (W) 415 / 16.34 x (H) 465 / 18.31 x (D) 190 / 7.48  Weight (empty): 3.25 kg / 7.16 lbs	
Optional optic adapters	Side view prism for 6 mm interchangeable probes Side view prism with wide-angle for 6 mm interchangeable probes Wide-angle adapter for 6 mm interchangeable probes  Side view prism for 8 mm interchangeable probes  Side view mirror for 12.7 mm interchangeable probes	
Optional centering device kits	VUMAN® 6 mm X-WAY, Ø in mm / inch: 60 / 2.36   44 / 1.73   34 / 1.34   24 / 0.94   17 / 0.66  VUMAN® 6 mm non-articulating, Ø in mm / inch: 44 / 1.73   19 / 0.74  VUMAN® 8 mm X-WAY, Ø in mm / inch: 60 / 2.36   44 / 1.73   34 / 1.34   24 / 0.94   17 / 0.67  VUMAN® 8 mm non-articulating, Ø in mm / inch: 60 / 2.36   44 / 1.73   34 / 1.34   24 / 0.94   17 / 0.67  VUMAN® Revolver 12.7 mm, Ø in mm / inch: 60 / 2.36   46 / 1.81   36 / 1.42   26 / 1.02	
Optional pushing aid	PE coated glass fiber pushing aids with 4.5 mm / 0.17" for up to 30 m / 100 ft. video probe length	
Optional battery incl. charging unit	Capacity high-current NiMh battery: 11.000 mAh, 12 Volt  Operation time: Up to 2.5h, X-WAY operation 5 % duty cycle	

Are you missing the ideal VUMAN configuration for your individual application? Contact us! viZaar is specialized in the development of customized special solutions. We will gladly assist and advise you.





[www.vizaar.com](http://www.vizaar.com)



FURTHER  
INFORMATION

# VUMAN<sup>®</sup> E3<sup>+</sup>

dition<sup>-64</sup>

## EXPANDING YOUR VU<sup>®</sup>



**viZaar industrial imaging AG**  
Headquarter  
Hechinger Straße 152  
72461 Albstadt / Germany  
Tel.: +49 7432 98375-0  
Fax: +49 7432 98375-50  
info@vizaar.com

**viZaar industrial imaging AG**  
VT Service / Rental Service / Sales / Training  
Center  
Lupusstraße 17  
35789 Weilmünster-Wolfenhausen / Germany  
Tel.: +49 6475 91129-0  
Fax: +49 6475 91129-29

**viZaar industrial imaging AG**  
viZaar North Germany  
VT Service / Rental Service / Sales  
Hasklintweg 8  
29339 Wathlingen / Germany  
Tel.: +49 160 93777644  
Fax: +49 6475 91129-29

#### OUR SALES AND SERVICE OFFICES

**viZaar NRW**  
Sales and Service Office  
46348 Raesfeld / Germany  
Tel.: +49 170 5703130

**viZaar North**  
Sales and Service Office  
25361 Krempe / Germany  
Tel.: +49 171 5524094

**viZaar South**  
Sales and Service Office  
88171 Weiler-Simmerberg / Germany  
Tel.: +49 172 6019601



**viZaar industrial imaging SA**  
3 rue Lambert  
Parc Lavoisier  
91410 Dourdan / France  
Tel.: +33 1608 11818  
Fax: +33 1645 99573  
www.vizaar.fr  
info@fort-fr.com

Authorised sales and service distributor of viZaar<sup>®</sup>: