

UVIN




Genuine 365nm UV and daylight dualscope

NDT: MT / PT supporting videoscope
Food processing: Contamination search
Automotive: Body-cavity sealing control
Infrastructure: Air condition leakages

Employing the latest LED illumination technology, known draw backs from quartz or liquid UV light guides are history with INVIZ Uvin. In UV mode, the probe will emit exactly 365nm light enabling PT and MT inspections in a quality and of areas that weren't possible before... Adding white light on a freely chosen level will allow easy access and full orientation inside the application. Failures are easy to identify. The viewing contrast can't be higher.

The worlds first real UV dual videoscope is available in two diameters and two standard length: 4 meter desktop and 8 or 15 meter reel design. With as little as 13 millimeter the Uvin 13.4 probe will allow to inspect even trough the smallest entrance. The quad beam of the Uvin 43 will give a full overview even in huge cavities such as large engine cylinders and the like.




- 1 PT testing turbine component UV
- 2 Flaw search (VT) using INVIZ VUMAN 8/8 RF in close-up mode
- 3 PT flaw test using INVIZ Uvin
- 4-6 Body-cavity wax sealing control

Uvin 4 m


Power requirements	96 - 256 VAC, 50 / 60 Hz / 60 Watt
Dimensions Weight	(B) 236 mm x (H) 133 mm x (T) 285mm, desktop 4,3 kg
Control	UV-Emission 0 - 100%, Weißlicht 0 - 100%, Weißabgleich justierbar
Video out	S-Video / Composite, PAL
Video resolution	PAL: 440.000 px / (H) 752 x (V) 582
Optic	Standard: 130° FOV bei 0° DOV
Probe	4 m length / 10 mm diameter, camera head 13.4 mm, probe and probe head made of stainless steel / polyurethane



Oil contamination in water showing up white using UVIN

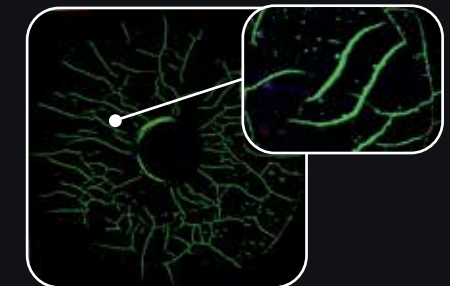

MT calibration body. Reference standard Type 1 (MTU-No.3) according EN 9934-2. Original screenshot UVIN 13.4

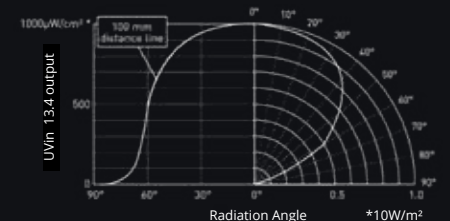

Illumination performance X 12. utilizing one single Diode. UVin 40 is utilizing four UV power diodes

Light parameters

UV 365 nm out	100mm distance scope – target / 0° DOV, +/- 20° : 1000μW/cm² (10W/m²), remaining visible part less 10 lx. Scope of illumination > FOV
UV LED lifetime	> 10.000 hrs
Daylight out	30 lumen, 2 LED, Scope of illumination > FOV
Daylight LED lifetime	> 10.000 hrs

Recommended consumables

MT	Fluorescent magnetic materials, grain size 2-14μm, fluorescence coefficient min. 2cd/W, ideal mixing ratio must be evaluated before usage
PT	Typ I (fluorescenting) penetrant according AMS – 2644, Level 3 and 4 / (method A)
Other UV applications	All materials emitting visible light due to absorption of 365nm UV energy


Operating environment / storage

Camera operation range	-15°C bis +65°C (+5°F bis +150°F)
CCU operation range	-20°C bis +45°C (-4°F bis +115°F)
Watertightness	1.5 bar / 15 meter water

Custom made systems



UVin 43

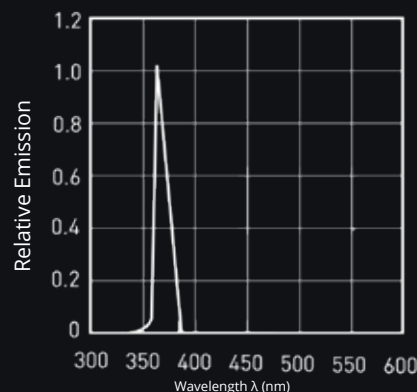

UV emission spectrum



viZaar industrial imaging AG
Headquarter
Hechinger Straße 152
72461 Albstadt / Germany
Tel.: +49 7432 98375-0
Fax: +49 7432 98375-50
Freecall 0800 3600371 (only within Germany)
info@vizaar.com

OUR SALES AND SERVICE OFFICES

viZaar NRW
Sales and Service Office
46348 Raesfeld / Germany
Tel.: +49 170 5703130

viZaar industrial imaging AG
VT Service / Rental Service / Sales /
Training Center
Lupusstraße 17
35789 Weilmünster / Germany
Tel.: +49 6475 91129-0
Fax: +49 6475 91129-29

viZaar Küste/Maritim
Sales and Service Office
25361 Kremppe / Germany
Tel.: +49 171 5524094

viZaar industrial imaging AG
viZaar North Germany
VT Service / Rental Service / Sales
29339 Wathlingen / Germany
Tel.: +49 160 93777644
Fax: +49 6475 91129-29

viZaar Süd
Sales and Service Office
88161 Lindenberg in Allgäu / Germany
Tel.: +49 172 6019601



viZaar industrial imaging SA
3 rue Lambert
Parc Lavoisier
91410 Dourdan / France
Tel.: +33 1608 11818
Fax: +33 1645 99573
www.vizaar.fr
info@fort-fr.com