


inVizX 98

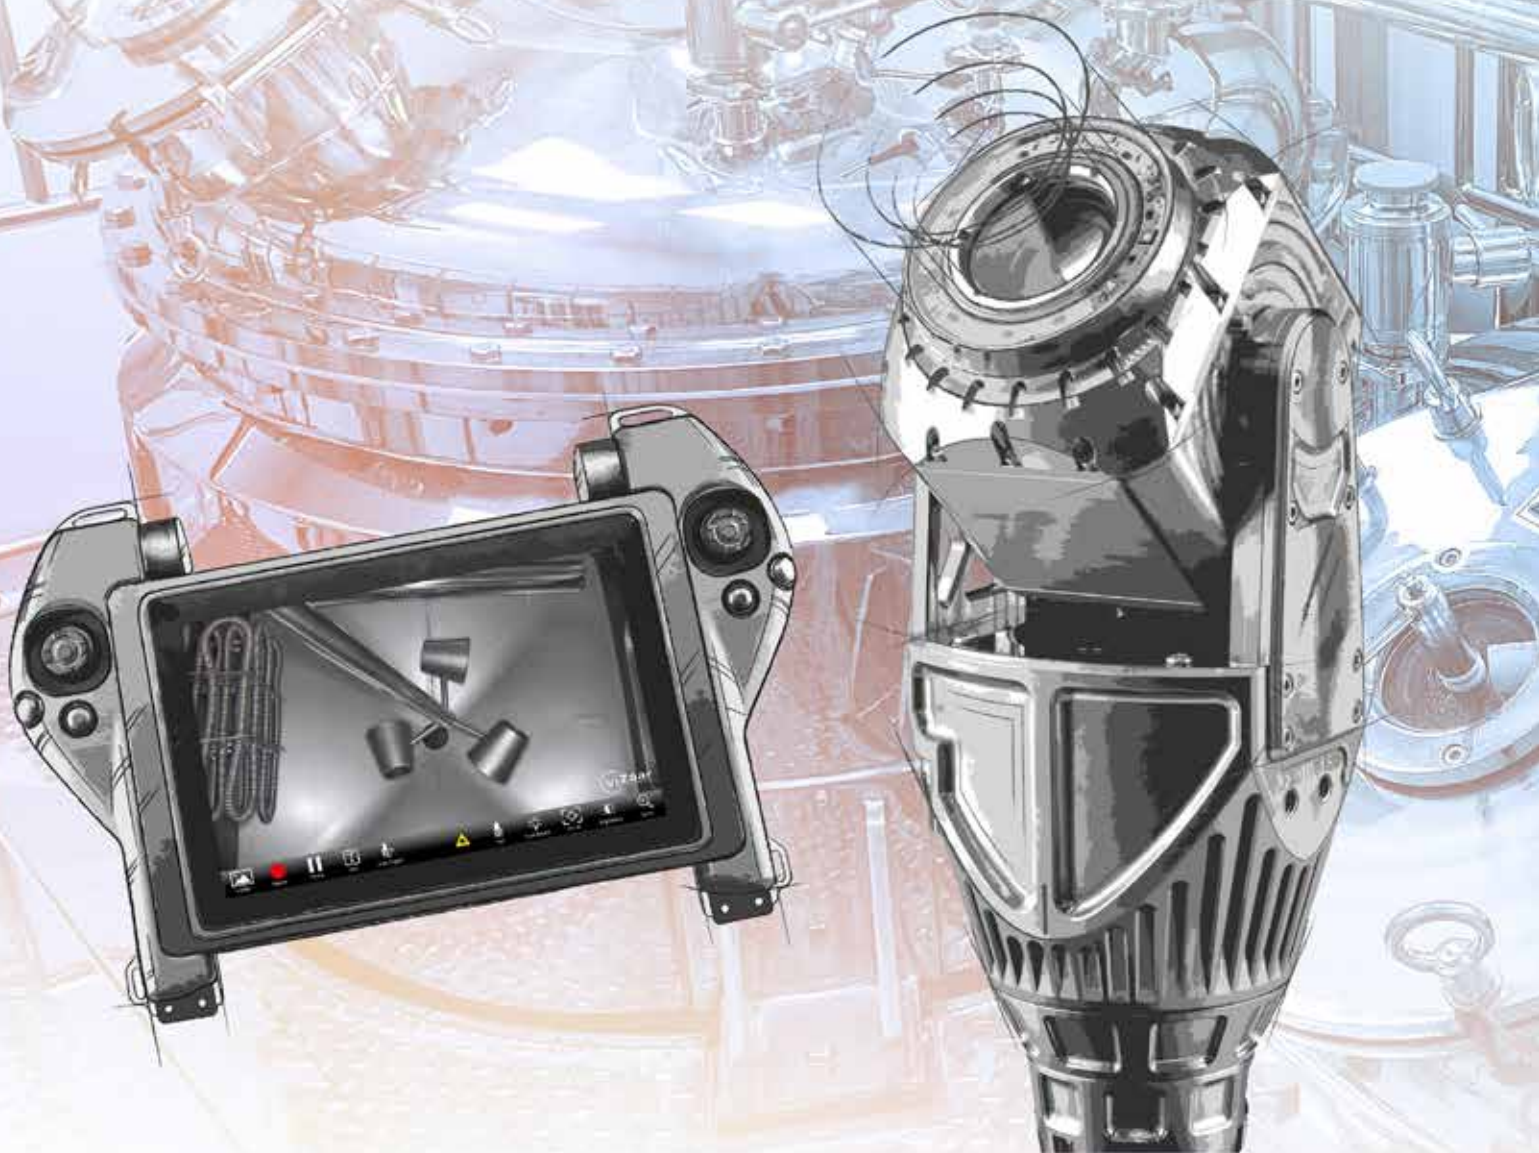

X PANDING YOUR **VU**
IN FULL **HD**

inVIZ X 98

Next-Generation Digital Full HD Pan-Tilt-Zoom Camera

Highly Corrosion-Resistant **Titanium Housing** with a Compact **Ø 98 mm**. Engineered for Use in **Industrial, Chemical, Pharmaceutical, Nuclear** Sectors & More

Advanced **Dual-Touch** Interface with **Joysticks, Buttons, and Scroll Wheels** for Professional Control

The most **Ergonomic** Control Unit on the Market, featuring IP64 Protection and an **Aluminum-Carbon Fiber** Housing for Maximum User Comfort

10.1" IPS-TFT Display with **Full-HD+** and **1920 x 1200** Pixels for Outstanding, **Uncompressed Image Quality**

Intuitively Designed Camera Control **Icons** Placed **Outside the Inspection Image** Ensure an Unobstructed View and Maximum Operating Efficiency





Up to **8 Hours** of Inspection Time with a Standard Professional-Grade Battery

Compact **All-in-One** Solution with an Impressive Total Weight of Just **18 kg***


Dimmable **Wide-Angle LED** for Perfect Illumination with up to **2000 Lumens**

At Just **1900g**, a Milestone in State-of-the-Art Technology and a True **Lightweight**

Continuous **360°** Rotation Combined with **±165°** Tilt Capability and Ultra-Fast **Speed Positioning**

Future-Proof Platform Designed to Support all Next-Generation Full-HD Inspection Camera Heads

*Depending on configuration



DISPLAY

Native Full HD display at optimal screen size thanks to a dedicated control bar **WITHOUT** cropping of the inspection image.



WEATHER RESISTANCE

The VUnit meets **IP65 protection standards**, making it resistant to dust and water spray, perfect for outdoor use.



HDMI

Uncompressed live image without overlays for **seamless system integration**, real-time analysis, and cross-location collaboration.




MODULARITY

With its smart design and optional **expansion slot**, the system can be easily adapted to meet specific customer requirements.



RESOLUTION

The **uncompressed** Full HD resolution of 1920 x 1080 pixels provides **lossless** PNG inspection images and Full HD video recordings.



TOUCHSCREEN

The capacitive dual-touch screen allows simple operation **WITHOUT** a touch pen and even with protective gloves (PPE).




DAYLIGHTPROOF

With a brightness of 850 nits, the screen remains perfectly readable even in **DIRECT** sunlight.



DESIGN

With a diameter of just 97.8 mm, the INVIZx98 meets **ALL requirements** in terms of accessibility and robustness.



HOUSING

Corrosion-resistant titanium for maximum robustness or **hard-anodized** aluminium for low weight and minimal surface contamination.



WATERTIGHT

The INVIZx98 is certified watertight as standard up to a depth of **45 meters** (4.5 bar/ 65 psi), with optional extension available up to **60 meters** (6 bar/ 87 psi).



ROTATION

Fast 360° rotation in under 4 seconds or **precise** positioning during operation with zoom.



ILLUMINATION

Separate light control with two nearly **stepplessly dimmable** white light LED channels with turbo mode up to 2000 lumens. Optional: UV lighting with **365 nm**.



ZOOM

The 10x optical zoom delivers crisp, clear detail, with an adjustable **field of view from 68° to 6°**, ideal for wide and close-range views.




BATTERY OPERATION

Up to **8 hours** of mobile work with standard professional grade batteries and **UNINTERRUPTED power transition** between battery and mains.



FOCUS

With a minimum focus distance of just **10 mm**, high-detail inspections are possible even at close range - perfect for confined spaces.



TEMPERATURE

The operating temperature range of **minus 25 °C** to **plus 48 °C** (-13 °F to 118 °F) can be extended up to **plus 75 °C** (167 °F) with active air cooling.

SUPERIOR IMAGE QUALITY

FULL-HD WITHOUT COMPROMISE

The INVIZx98 delivers uncompressed Full-HD (1920 x 1080) with exceptional light sensitivity (0.125 lux) and a 68° field of view.

Powered by state-of-the-art Sony® IMX® sensor technology and a minimum focus distance of just 10 mm, it captures some of the sharpest, most detailed inspection images in its class. This is achieved by strictly eliminating lossy data compression and avoiding any error-prone downscaling or upscaling of image content. Thanks to its outstanding low-light performance, the INVIZx98 delivers clear, high-contrast imaging even in very dark environments, minimizing the need for external lighting. This helps to avoid disruptive reflections, shadows, or glare while enhancing overall image quality.

TITANIUM OR ALUMINIUM?

AEROSPACE TECHNOLOGY FOR
EXTREME DURABILITY

Engineered with aerospace-grade titanium, the INVIZx98 delivers unmatched durability and dependability. Weighing just 1,900 g (4.2 lbs), it combines extreme ruggedness with a lightweight design. It is optionally watertight up to 60 m (6 bar) and resistant to saltwater, acids, bases, and solvents, ideal for inspections in the harshest environments. When weight is critical and surface contamination is a concern: INVIZx98 Al, made from hard-anodized aluminum.

NEW ERA

THE PATH TO AUTOMATION

The INVIZx98 offers continuous 360° rotation and a 330° tilt range ($\pm 165^\circ$), enabling a comprehensive panoramic view. It can return to its home position or any predefined angle in under two seconds. Custom viewing angles can be stored, and the zero position can be redefined, simplifying navigation inside containers and supporting repeatable inspection routines. These capabilities streamline workflows and boost efficiency in complex inspection environments.

PRECISION LIGHTING FOR DEMANDING ENVIRONMENTS

An optional 365 nm UV light for cleanliness inspection, along with the ability to connect additional laser modules or high-power LED boosters, significantly enhances the system's lighting performance and application versatility.



BROAD RANGE OF APPLICATIONS

UNLIMITED VERSATILITY


The INVIZx98 sets new standards across a wide spectrum of inspection scenarios. Its outstanding performance benefits large-scale components that require intensive illumination, panoramic visibility, and zoom capabilities, such as tanks, reactors, or agitator vessels.

It proves especially reliable in underwater inspections, such as those involving nuclear assemblies, marine components, or other flooded environments, thanks to its corrosion resistance and watertightness up to 60 meters.



CUSTOM SOLUTIONS


When standard tools aren't enough, viZaar develops custom solutions tailored to your unique inspection needs. Thanks to expansion options, the INVIZx98 can be precisely adapted to special inspection tasks, making it a reliable companion for every challenge.



ACTIVE COOLING

INNOVATIVE THERMAL MANAGEMENT

The INVIZx98 features an advanced active cooling system that directs airflow through a dedicated inlet, channeling cool air to internal components while expelling warm air through an outlet at the top. This ensures stable operating temperature even under heavy use and in demanding environments. The electronics are effectively protected from overheating, ensuring long-term reliability and peak performance.

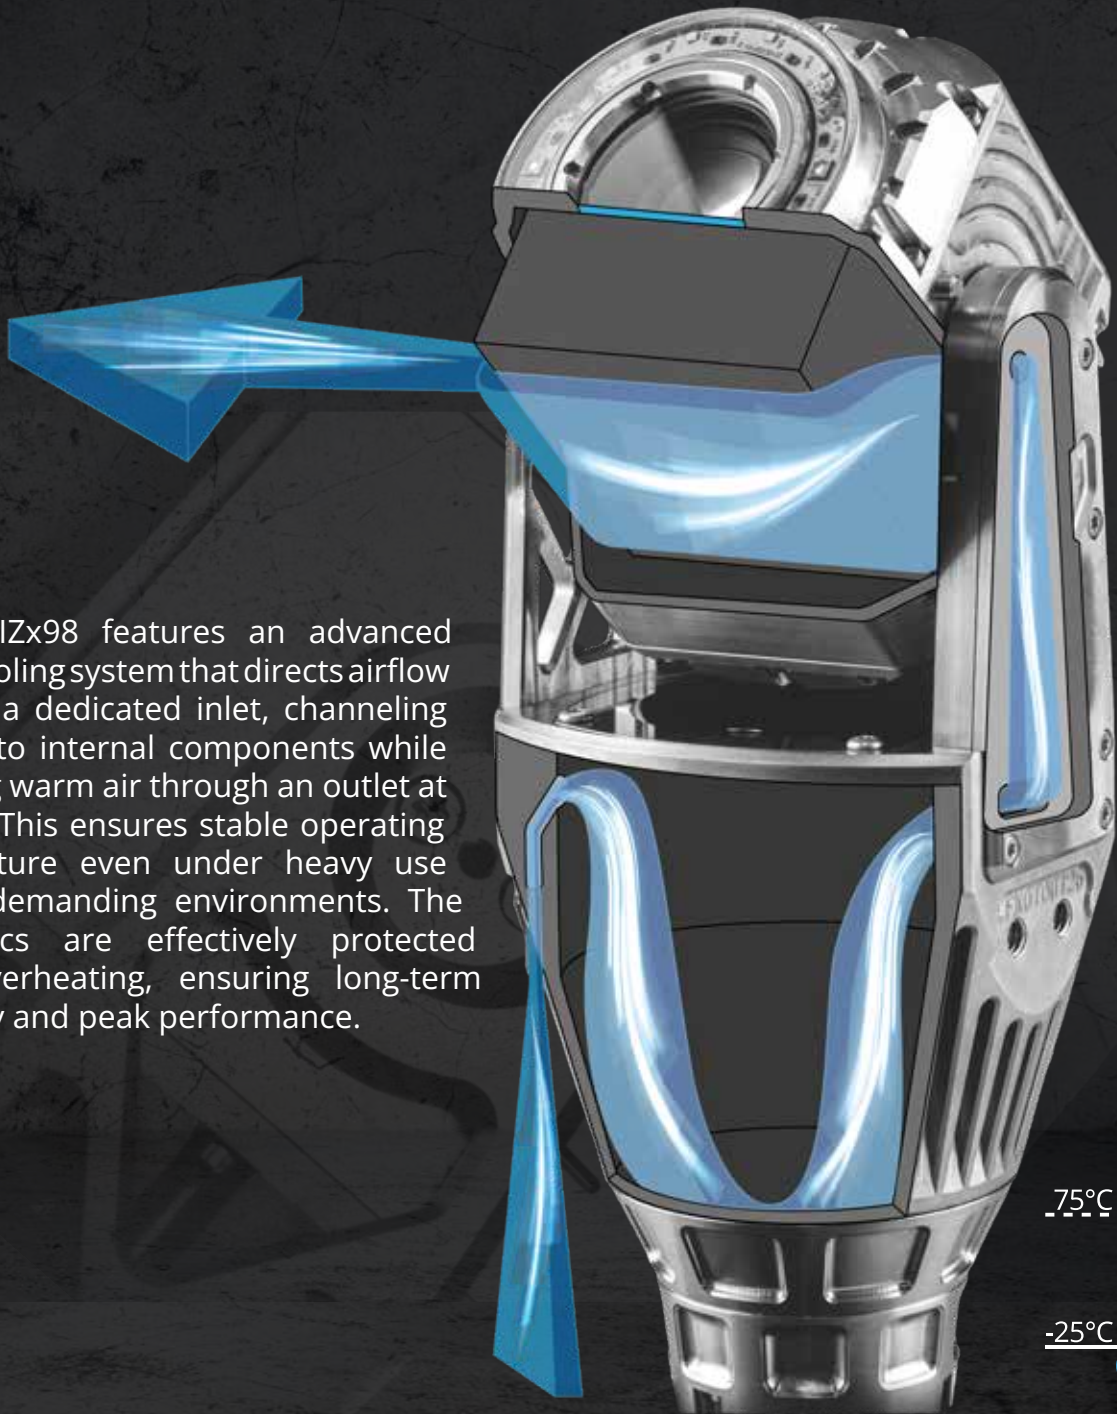



FULL-HD CONTROL UNIT WITH INTEGRATED VIDEO DOCUMENTATION

- 1 Aluminum-Carbon Composite: Lightweight yet Highly Durable
- 2 Scroll Wheel for Quick Adjustments
- 3 Intuitive Joystick Control for Easy Camera Head Movement
- 4 Direct-Access Buttons
- 5 Capacitive Dual-Touchscreen, fully Operable with Protective Gloves (PPE)
- 6 External Storage Options: USB + SD Card
- 7 HDMI Output for Uncompressed Image Output



High-Resolution Display

- 10,1" IPS-TFT-Panel
- Display Resolution: 1920 × 1200 px
- Native Full-HD Inspection Image: 1920 × 1080 px
- 16.7 Million Colors
- Brightness: 850 cd/m² (850 nits)
- User-Friendly Interface with Intuitive Icon Navigation, Direct-Access Buttons, Joysticks, and Scroll Wheels

Ergonomic Design

- Compact, Ergonomic Grip Design
- Ideally Positioned Joysticks for Fatigue-Free Operation
- Ultra-Light Housing made from Aluminum-Carbon Composite

ADAPTIVE OPERATION

FOR MAXIMUM FLEXIBILITY

The VUnit sets new standards in adaptability and user comfort. Whether positioned on a tabletop, securely mounted for hands-free use or worn with a neck strap, it adapts effortlessly to the needs of the operator. It can also be controlled directly from the VUcase, making it especially practical for mobile inspections.

For improved ergonomics, the VUnit can even be suspended to provide a clear and comfortable viewing position. This adaptability ensures smooth operation in any inspection environment, regardless of on-site challenges.



MODULAR DESIGN

QUICK REPLACEMENTS EASY MAINTENANCE

The VUnit is divided into five independent modules, each of which can be quickly and easily replaced when needed. This modular concept simplifies maintenance, speeds up repairs, and significantly reduces downtime and service costs.

Its user-friendly design allows components to be replaced on-site without the need for special tools or technical support. This ensures the VUnit remains fully operational and ready to adapt to evolving inspection demands.





DEVELOPED BY INSPECTORS FOR INSPECTORS

The VUapp is a purpose-built software solution, designed specifically to meet the demands of professional inspection workflows. It combines a powerful architecture with an intuitive user interface, enabling Full-HD video recording and lossless PNG image capture with exceptional quality.

With its DualCapture technology, the VUapp allows simultaneous video recording and still image capture, without any loss in quality. The integrated text generator with comment function makes it easy to overlay key system data, pressure values or camera positions directly onto recordings.

Even with large volumes of data, the advanced metadata search function ensures quick and targeted retrieval of inspection results.

Software updates can be installed effortlessly on-site via flash drive, keeping your system up to date without the need for time-consuming shipping or service appointments.



UNCOMPRESSED VIDEO OUTPUT

STREAMLINED AI INTEGRATION

The VUnit's integrated HDMI output delivers uncompressed inspection imagery, free from disruptive graphical overlays, ready for direct integration into existing AI systems.

With an impressive action-to-image latency of just 120 ms, reliable real-time analysis is ensured. Its open interface enables fluid integration of customer-specific AI applications, supporting automated inspection workflows, reduced processing times, and efficient downstream data handling.



Moreover, the HDMI interface promotes cross-location collaboration:

Inspection results can be captured on-site and simultaneously shared and analyzed in real time with remote team members. This not only cuts travel costs but also enhances decision-making and significantly improves process reliability.

VUcase

TRANSPORT CASE WITH INTEGRATED VIDEO INTERFACE


The VUcase is the ideal interface for the INVIZx98 and the VUnit, combining exceptional functionality, flexibility, and durability in one smart, field-ready design. Its built-in video interface and versatile power options enable professional-grade operation in any environment.

The system can be powered via mains or high-capacity professional-grade lithium-ion batteries, offering up to 8 hours of continuous use. A seamless switch between power sources during operation ensures uninterrupted inspections.

The VUcase also provides generous storage space for the camera head, connection cables, VUnit, and accessories. With IP53 protection in horizontal position and the ability to operate the system even with the lid closed, the VUcase proves exceptionally resilient, even under challenging weather conditions.



DYNAMIC VIDEO TRANSMISSION & CUSTOM INTEGRATION

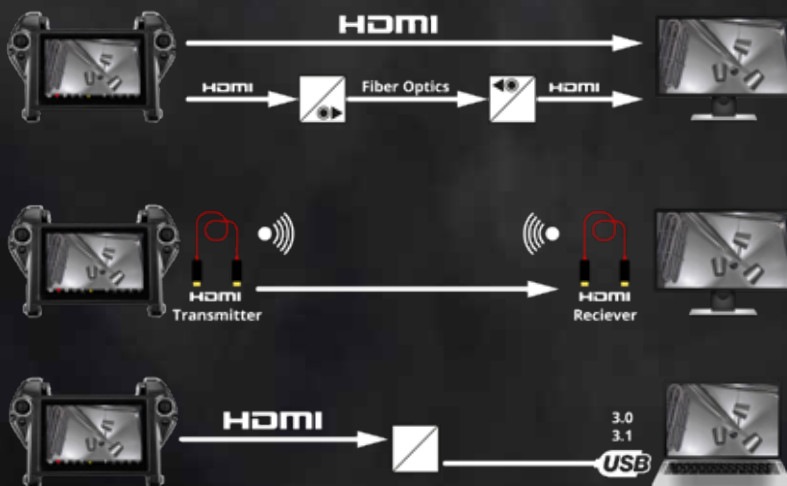

The VUnit's standardized HDMI interface enables straightforward and commercially proven solutions for both wired and wireless video transmission.

The three most common methods are illustrated in the adjacent graphics.

Ask us about simple integration of these transmission options into the VUcase housing.

For connecting to your IT systems (e.g., a laptop), we recommend using a commercially available HDMI-to-UVC converter (minimum USB 3.0).

This approach ensures that cybersecurity remains fully under your organization's control.



CAMERA HEAD	INVIZx98 Ti 45	INVIZx98 AI 45	INVIZx98 AI UV365
Type	1/3" Sony CMOS Sensor	1/3" Sony CMOS Sensor	1/3" Sony CMOS Sensor
Resolution	1920 (H) x 1080 (V)	1920 (H) x 1080 (V)	1920 (H) x 1080 (V)
Zoom	10 x Optical Zoom	10 x Optical Zoom	10 x Optical Zoom
Focus Range	10 mm 0.39 in	10 mm 0.39 in	10 mm 0.39 in
Light Sensitivity	Color 0,125 lx	Color 0,125 lx	Color 0,125 lx
Shutter Speed	1/30 (25) bis 1/30,000 sec	1/30 (25) bis 1/30,000 sec	1/30 (25) bis 1/30,000 sec
Camera Temperature Display	Yes	Yes	Yes
Cable Length	3 m, 30 m, 50 m and optionally up to 80 m, wound on the viZaar® cable reel VUreel	3 m, 30 m, 50 m and optionally up to 80 m, wound on the viZaar® cable reel VUreel	3 m, 30 m, 50 m and optionally up to 80 m, wound on the viZaar® cable reel VUreel
FOV	68° - 6,8°	68° - 6,8°	68° - 6,8°
Image Enhancement Features:	Wide Dynamic Range & Advanced Noise Reduction	Wide Dynamic Range & Advanced Noise Reduction	Wide Dynamic Range & Advanced Noise Reduction
ILLUMINATION			
Light Source	2 x 1000 lumen Dual wide-angle LEDs	2 x 1000 lumen Dual wide-angle LEDs	2 x 1000 lumen Dual wide-angle LEDs
			UV 365 nm, 1000 µW/cm² at 28 cm in accordance with DIN ISO 3059
OPERATING ENVIRONMENT			
Temperature Range	-25°C to +48°C (-13°F to 118.4°F)	-25°C to +48°C (-13°F to 118.4°F)	-25°C to +48°C (-13°F to 118.4°F)
Pressure Resistance:	4.5 bar (≈ 65 psi)	4.5 bar (≈ 65 psi)	4.5 bar (≈ 65 psi)
Internal Housing Overpressure:	Max. 2 bar (≈ 29 psi)	Max. 2 bar (≈ 29 psi)	Max. 2 bar (≈ 29 psi)
PAN AND TILT RANGE			
Pan Range:	360° continuous rotation	360° continuous rotation	360° continuous rotation
Tilt Range:	330° – from -165° to +165°	330° – from -165° to +165°	330° – from -165° to +165°
Axis Speed:	Full 360° rotation in under 4 seconds	Full 360° rotation in under 4 seconds	Full 360° rotation in under 4 seconds
DIMENSIONS			
Weight:	1900 g 4.19 lb	1400 g 3.08 lb	1400 g 3.08 lb
Dimensions (mm):	Width: 97.8 mm 3.85 in Height: 135 mm 5.3 in	Width: 97.8 mm 3.85 in Height: 135 mm 5.3 in	Width: 97.8 mm 3.85 in Height: 135 mm 5.3 in
Accessory Mounting:	M6 mounting points	M6 mounting points	M6 mounting points
Housing:	Corrosion-resistant grade 5 titanium housing	Combination of red anodized and hard-anodized aluminum	Combination of red anodized and hard-anodized aluminum

ACCESSORIES

Accessory Box	• Adapter for strain relief, carbon poles, push poles and compressed air • Strain relief • Special tools for assembly	
Optional Batteries incl. charging system	• Stihl Akku AP 200 S • Stihl Akku AP 300 S • Stihl Akku AP 500 S	
Pneumatic Handpump	For pre-pressure adjustment and continuous pressure monitoring	
Carbon Poles	Used for mounting and guiding the camera head inside the test object; extendable and available in 1 m and 2 m lengths.	
Cable Strain Relief	Protects cable connections from tensile forces when removing the camera head; essential when the camera is used in a suspended position.	
Commercially Available Accessories Tested and Recommended for Operation with the VUnit	1. USB drive with hardware security: User-friendly stick with military-grade security architecture for reliable protection of sensitive inspection data. 2. Streaming solution for real-time applications: Plug-and-play system for true-color, latency-free transmission of the inspection image for AI applications or collaboration with remote teams.	
Manhole Tripod	Simplifies the inspection of containers / chambers through targeted guidance / mounting	



www.vizaar.com



For more
information

invizX 98

XPANDING YOUR VU® IN FULL HD



Headquarter

Hechinger Straße 152
72461 Albstadt / Germany
Fon.: +49 7432 98375-0
Fax: +49 7432 98375-50
Free call 0800 3600371
(only within Germany)
info@vizaar.com

VT Service / Rental Service / Sales / Training Center

Lupusstraße 17
35789 Weilmünster / Germany
Fon.: +49 6475 91129-0
Fax: +49 6475 91129-29

viZaar North Germany

VT Service / Rental Service / Sales
29339 Wathlingen / Germany
Fon.: +49 160 93777644
Fax.: +49 6475 91129-29

OUR SERVICE AND SALES OFFICES

viZaar NRW

Sales and Service Office

46348 Raesfeld / Germany
Fon.: +49 170 5703130

viZaar Maritime

Sales and Service Office

25361 Krempe / Germany
Fon.: +49 171 5524094

viZaar South

Sales and Service Office

88161 Lindenberg in Allgäu / Germany
Ton.: +49 172 6019601



viZaar industrial imaging SA

3 rue Lambert
Parc Lavoisier
91410 Dourdan / France
Fon.: +33 1608 11818
Fax: +33 1645 99573
www.vizaar.fr
info@vizaar.fr

Authorized trade and distribution partner of viZaar®: